


尺寸DN	Size	Φd	L	F	H	H1	ΦB1	ΦB2	P	ΦA1	ΦA2	A	W	B	螺纹类型Screw Type
15	1/2"	11.0	79.0	39.5	42.0	70.0	42.0	36.0	9.0	6.0	6.0	9.0	135.0	27.0	NPT
20	3/4"	15.0	88.0	44.0	49.0	77.0	50.0	36.0	9.0	6.0	7.0	9.0	135.0	34.0	BSP
25	1"	20.0	108.0	54.0	59.5	87.0	50.0	42.0	11.0	6.0	7.0	11.0	170.0	41.0	PT
32	1-1/4"	25.0	124.0	62.0	63.0	93.0	70.0	42.0	11.0	6.0	9.0	11.0	170.0	50.0	DIN
40	1-1/2"	32.0	135.0	67.5	73.5	103.0	70.0	50.0	14.0	7.0	9.0	14.0	200.0	56.0	etc.
50	2"	40.0	164.0	82.0	82.5	113.0	70.0	50.0	14.0	7.0	9.0	14.0	200.0	70.0	

## 主要零件及材料 MAIN PARTS AND MATERIALS

序号 NO.	零件名称 Parts description	材质 Material
1	阀体 Body	CF8M CF8 WCB
2	阀盖 Cap	CF8M CF8 WCB
3	球体 Ball body	316 304
4	阀座 Seat	PTFE PPL
5	阀杆 Stem	316 304 2Cr13
6	阀盖垫圈 Body Gasket	PTFE
7	防静电装置 Anti-Static	304
8	止推垫片 Thrust Washer	PTFE
9	填料垫圈 Tension Washer	PTFE
10	过渡垫片 Transition Washer	增强聚四氟乙烯、柔性石墨 RPTFE、Flexible graphite
11	填料压环 Packing ring	304
12	蝶簧 Bellivel Washer	304
13	螺母 Nut	304
14	防松盖 Stop-lock cap	304
15	手柄螺母 Handle Nut	304
16	限位片 Lock Device	304
17	手柄 Handle	304
18	手柄套 Handle sleeve	塑料 Plastics
19	定位螺钉 Stop bolt	304

## 温度变化图 TEMPERATURE CHART PN1.6MPA

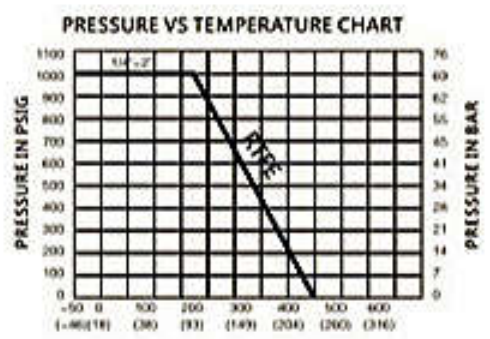

## 产品特征 SPECIFICATIONS

公称压力: 1000WOG(Class 400), PN64  
 适用温度范围: -20 ~ 250°C  
 适用介质: 水、油、气及某些腐蚀性液体(W.O.G)  
 螺纹类型: G · NPT.BSPT.BSP DIN259/2999

Working Pressure: 1000WOG(Class 400), PN64  
 Temperature Range: -20 ~ 250°C  
 Suitable medium: Water, oil, air and some Corrosive liquid  
 Thread type: G · NPT.BSPT.BSP DIN259/2999